


ISO 9001:2008 Registered

18 Utter Avenue Hawthorne, New Jersey 07506 USA Tel: 973-427-3800

Fax: 973-427-3778 www.iwtremont.com

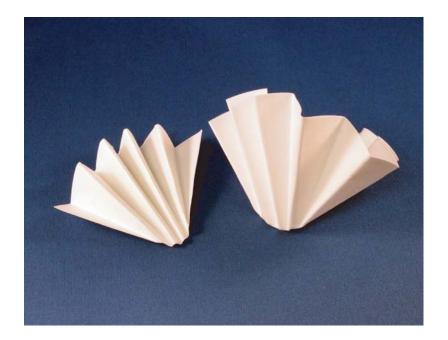

Fluted Qualitative Cellulose

Increased efficiency in prep time

Easier to use and more convenient than flat filters when used in a filter funnel, this laboratory staple reduces your prep time with sharply creased prefolded pattern.

Applications:

General laboratory separation & clarification Soil analysis methods Very high loading capacity Identical to Tremont grade CFP2

Retention	Flow speed	Surface	Brightness
8µm	Medium-slow	Smooth	Bright white

Ordering Information

I.W. Tremont catalog #:	Diameter (cm)	Packaging
CFP2F-125	12.5	100/pk
CFP2F-150	15.0	100/pk
CFP2F-185	18.5	100/pk
CFP2F-240	24.0	100/pk

Description	Tremont catalog #	Company	Grades	Catalog #
125 mm	CFP2F-125	Ahlstrom	513	5130-1250
		GE/Whatman	2V	1202-125
150 mm	CFP2F-150	Ahlstrom	513	5130-1500
		GE/Whatman	2V	1202-150
185 mm	CFP2F-185	Ahlstrom	513	5130-1850
		GE/Whatman	2V	1202-185
240 mm	CFP2F-240	Ahlstrom	513	5130-2400
		GE/Whatman	2V	1202-240



Product is neatly packaged in 10 poly band groups of 10 ready to use filters.

Trademarks are owned by their respective owners. Use of competitive trademarks are for reference only – no ownership or rights are implied.

Cross reference information is a compilation of the listed manufacturers equivalency charts and sales data, not actual test data.

Although reasonable attempt has been made to ensure equivalency between competitive products - individual testing is suggested for non-standard method applications.

